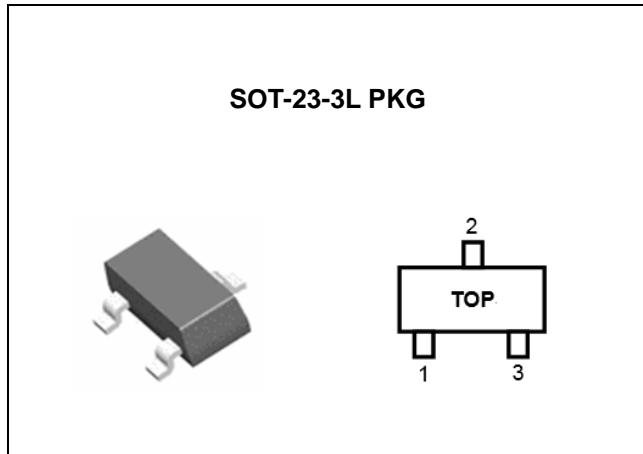


FEATURES

- Programmable Output Voltage to 36V
- Extended Cathode Current Range 80 μ A to 100mA
- Low(Typ. 0.08 Ω) Dynamic Output Impedance
- Adjustable Output Voltage
- Fast Turn-on Response
- Low Output Noise
- Excellent Temperature Coefficient 25ppm/ $^{\circ}$ C
- Moisture Sensitivity Level 3

**APPLICATION**

- Secondary Side Regulation in Flyback SMPS
- Industrial, Computing, Consumer and Portables
- Adjustable Voltage and Current Referencing
- Power Management
- Power Isolation
- Zener Replacement

ORDERING INFORMATION

Device	Package
LPR431GXSF	SOT-23-3L

* Refer to the page 2 for detailed ordering Information.

DESCRIPTION

The LPR431 is a three-terminal adjustable shunt regulator with a specified thermal stability. The output voltage may be set to any value between V_{REF} and 36V with two external resistors. The active output circuitry provides a very sharp turn-on characteristic making these devices an excellent replacement for Zener diodes in many applications, such as on board regulation, adjustable power supplies, and switching power supplies.

ABSOLUTE MAXIMUM RATINGS

(Full operating ambient temperature range applies unless otherwise noted.)


CHARACTERISTIC	SYMBOL	MIN.	MAX.	UNIT
Cathode Voltage	V_{KA}	-	40	V
Cathode Current Range	I_{KA}	-	150	mA
Reference Input Current Range	I_{REF}	-	10	mA
Junction Temperature Range	T_J	-40	150	$^{\circ}$ C
Operating Temperature Range	T_{OPR}	-40	125	$^{\circ}$ C
Storage Temperature Range	T_{STG}	-65	150	$^{\circ}$ C

RECOMMENDED OPERATING CONDITIONS


CHARACTERISTIC	SYMBOL	MIN.	MAX.	UNIT
Cathode Voltage	V_{KA}	V_{REF}	36	V
Cathode Current	I_{KA}	0.08	100	mA
Operating Temperature range	T_A	-40	85	°C

ORDERING INFORMATION

VREF	Package	Tolerance	Order No.	Supplied As	Status
2.5V	SOT-23-3L	0.5%	LPR431GCSF	Reel	Active
		1%	LPR431GASF	Reel	Active

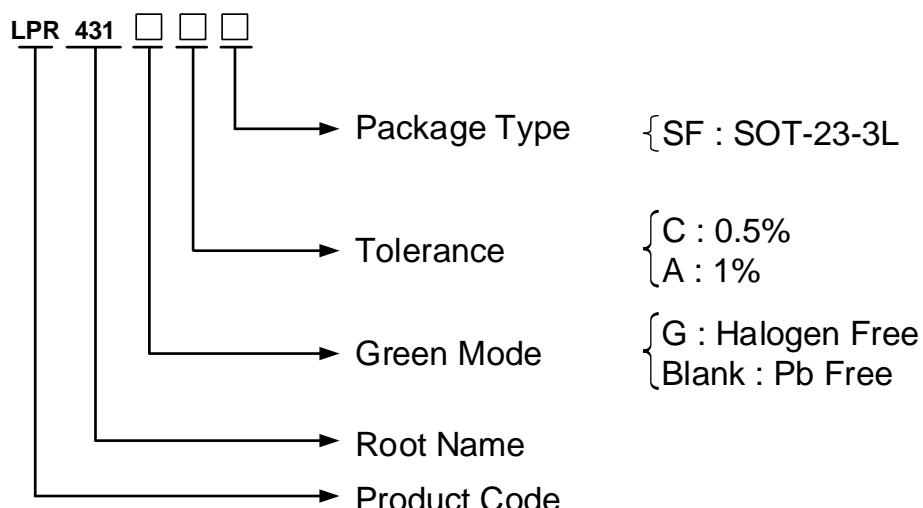

PIN CONFIGURATION

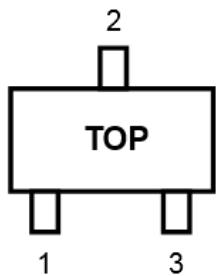

SOT-23-3L PKG

PIN DESCRIPTION




Pin No.	SOT-23-3L PKG	
	Name	Function
1	Cathode	Input Supply Voltage
2	Anode	Ground
3	Reference	Reference Voltage

ELECTRICAL CHARACTERISTICS

(T_A=25°C, unless otherwise specified)


CHARACTERISTIC	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Reference Input Voltage	V _{REF}	V _{KA} =V _{REF} , I _K =1mA	LPR431GC	2.487	2.500	2.512	V
			LP431GA	2.475	2.500	2.525	
Deviation of Reference Input Voltage ^(Note 1)	ΔV _{REF} /ΔT _A	V _{KA} =V _{REF} , I _K =1mA, T _A =Full range		-	35	50	mV
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage	ΔV _{REF} /ΔV _{KA}	I _K =1mA	ΔV _{KA} =10V to V _{REF}	-2.7	-1.0	-	mV/V
			ΔV _{KA} =36V to 10V	-2.0	-0.4	-	
Reference Input Current	I _{REF}	I _K =1mA, R ₁ =10kΩ, R ₂ =∞		-	180	500	nA
Deviation of Reference Input Current ^(Note 1)	ΔI _{REF} /ΔT _A	I _K =1mA, R ₁ =10kΩ, R ₂ =∞, T _A =Full range		-	100	300	nA
Minimum Cathode Current for Regulation	I _{K(MIN)}	V _{KA} = V _{REF}		-	30	80	uA
Off-State Cathode Current	I _{K(OFF)}	V _{KA} =36V, V _{REF} =0		-	0.01	1	uA
Dynamic Impedance ^(Note 2)	Z _{KA}	V _{KA} = V _{REF} , I _K =0.2mA~100mA, f ≤ 1kHz			0.08	0.3	Ω

TEST CIRCUITS
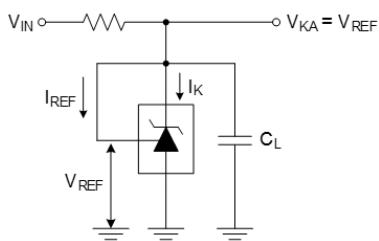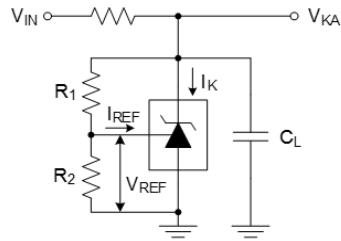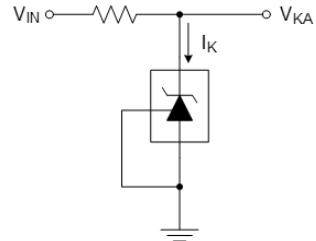
< Fig 1. Test circuit for V_{KA} = V_{REF} >Fig 2. Test circuit for V_{KA} ≥ V_{REF} >< Fig 3. Test circuit for I_{K(OFF)} >

(Note 1) The deviation parameters $\Delta V_{REF}/\Delta T_A$ and $\Delta I_{REF}/\Delta T_A$ are defined as the differences between the maximum and minimum values obtained over the recommended temperature range. The average full-range temperature coefficient of the reference voltage, αV_{REF} , is defined as :

$$|\alpha V_{REF}|(\text{ppm}/\text{C}) = \left(\frac{V_{I(\text{dev})}}{V_{REF} \text{ at } 25^\circ\text{C}} \right) \times 10^6$$

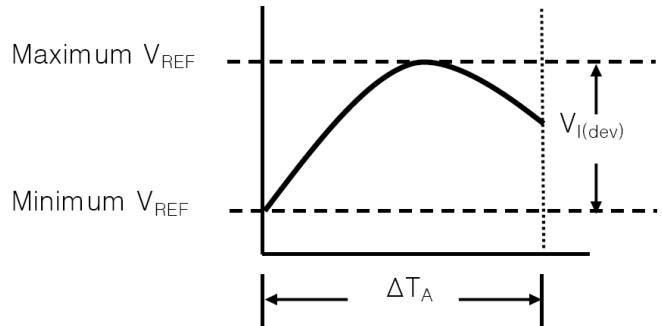

Where :

ΔT_A is the recommended operating free-air temperature range of the device.

αV_{REF} can be positive or negative, depending on whether minimum V_{REF} or maximum V_{REF} , respectively, occurs at the lower temperature.


(Note 2) The dynamic impedance is defined as : $|Z_{KA}| = \frac{\Delta V_{KA}}{\Delta I_{KA}}$

When the device is operating with two external resistors, the total dynamic impedance of the circuit is


given by: $|Z| = \frac{\Delta V}{\Delta I} \approx |Z_{KA}| (1 + R1/R2)$

TYPICAL APPLICATION


1. Shunt Regulator

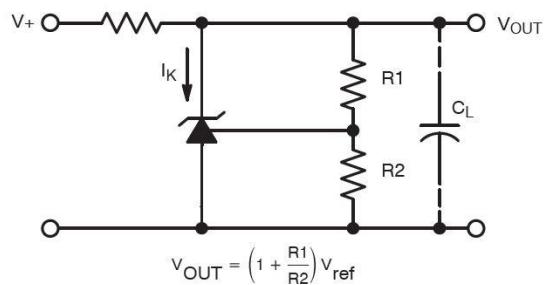


2. High Current Shunt Regulator

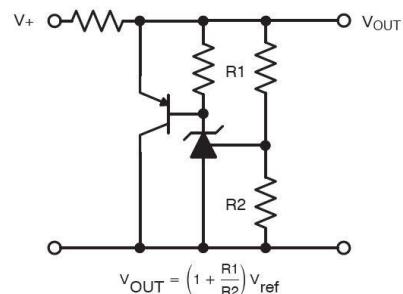


3. Output Control for a Three-Terminal Fixed Regulator

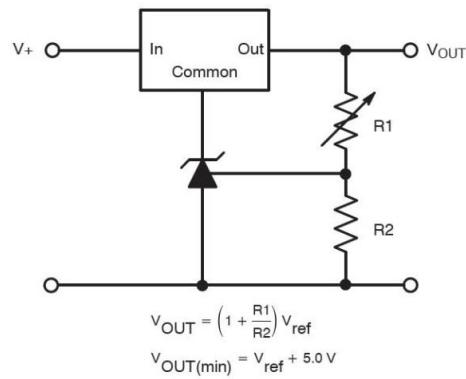


4. Series Pass Regulator

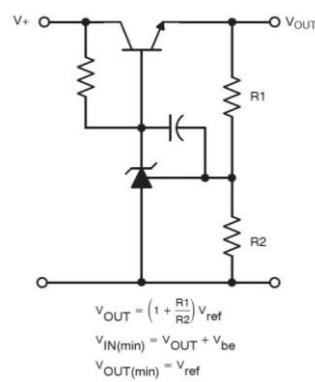

5. Constant Current Source

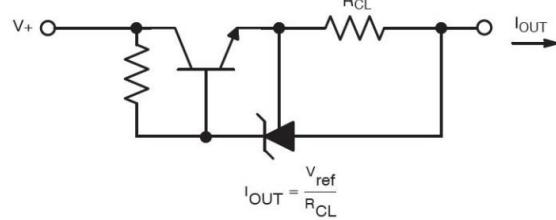

6. Constant Current Sink

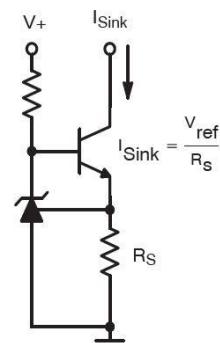

REVISION NOTICE

The description in this datasheet can be revised without any notice to describe its electrical characteristics properly.